




ARMY STYLE LOW HEADROOM TROLLEY KITS ^{CE}

1/2 to 10 Metric Ton Capacity


FEATURES

- Low headroom design increases lift height in low ceiling areas
- Direct mount to any standard HFS hoist by replacing the top hook assembly with the trolley assembly
- Durable all steel construction
- Machined cast iron wheels with precision sealed **"lubed for life"** bearings and universal tread design to fit flat or tapered beam flanges
- Hand chain drop is 10 feet
- Meets: ASME/ANSI B30.16, OSHA, NASA-STD-8719.9, EU Directives: 98/37/EC
- ATEX rated  II 3 GD IIA T4(X) for limited use in Hazardous Environments

OPTIONS

- Extended hand chain drop

**HOIST AND
TROLLEY KIT
MUST BE
ORDERED
SEPARATELY**

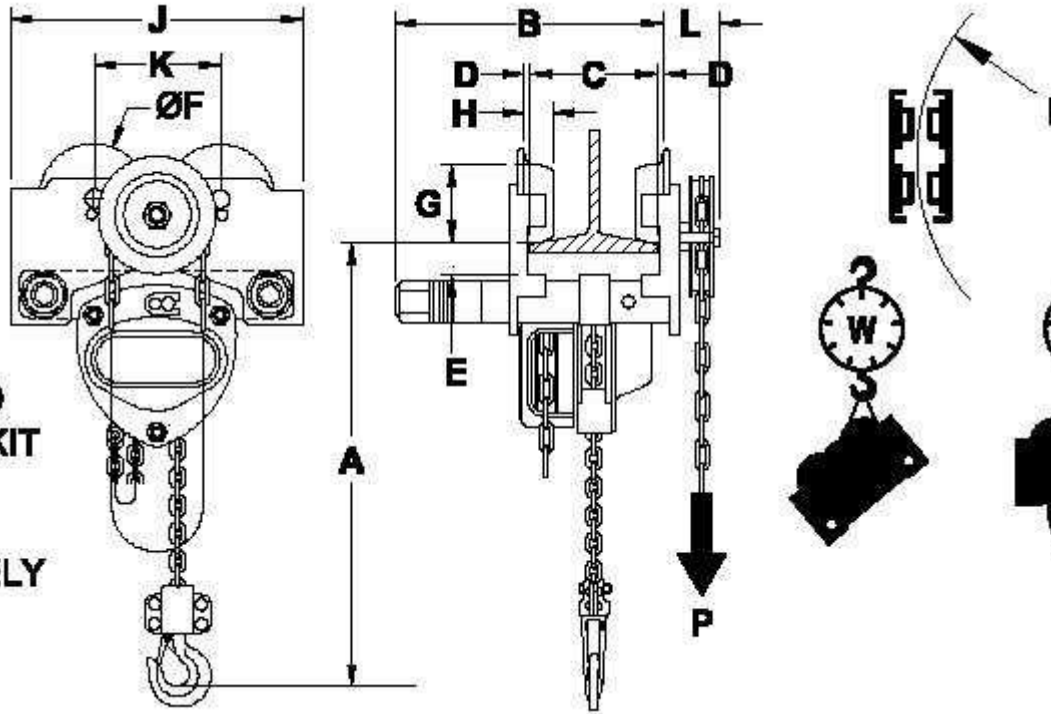

PTL & GTL SERIES SPECIFICATIONS and DIMENSIONS

(inches and pounds)

Model	WLL	A"	B"	C"	D"	E"	F"	G"	H"	J"	K"	L"	P (lbs)	R" Min.	W (lbs)	WH (lbs)
PTL005	1/2t	11.8	9.7	2.0-8.0	0.06-0.12	1.2	3.1	2.2	0.75	10.2	3.94	2.99	---	33	12	37
GTL005-10													6		22	46
PTL010	1t	13.0	14.1	2.5-12.0	0.06-0.12	1.4	3.8	2.7	0.79	11.5	4.92	3.05	---	39	26	55
GTL010-10													11		35	64
PTL020	2t	16.2	14.4	3.5-12.0	0.06-0.12	1.5	4.3	3.2	0.94	14.1	5.31	3.17	---	43	59	104
GTL020-10													20		68	113
PTL030	3t	18.1	14.7	3.9-12.0	0.06-0.12	1.6	5.3	3.9	1.06	17.1	6.22	3.37	---	51	62	143
GTL030-10													21		71	152
PTL050	5t	25.1	15.1	4.5-12.0	0.06-0.12	1.7	5.7	4.3	1.42	17.6	6.69	3.6	---	55	103	199
GTL050-10													31		114	210
PTL075	7.5t	29.3	16.4	4.9-12.0	0.08-0.14	1.8	6.9	5.1	1.61	17.4	7.87	4.29	---	78	----	363
GTL075-10													41		----	374
PTL100	10t	29.3	16.4	4.9-12.0	0.08-0.14	1.8	6.9	5.4	1.65	17.4	7.87	4.29	---	78	----	363
GTL100-10													54		----	374

How to specify Model: Example **GTL050-20** hand geared low headroom trolley (5t Capacity with 20 Ft hand chain drop)

Model -Drop

GTL050 -20

Note: If factory assembly to a hoist is required then note on the order. **Hoist and Trolley Kit must be ordered separately**