


SBT FITTINGS

SBT FITTINGS

TEFLINE PRODUCTS



SS MNPT

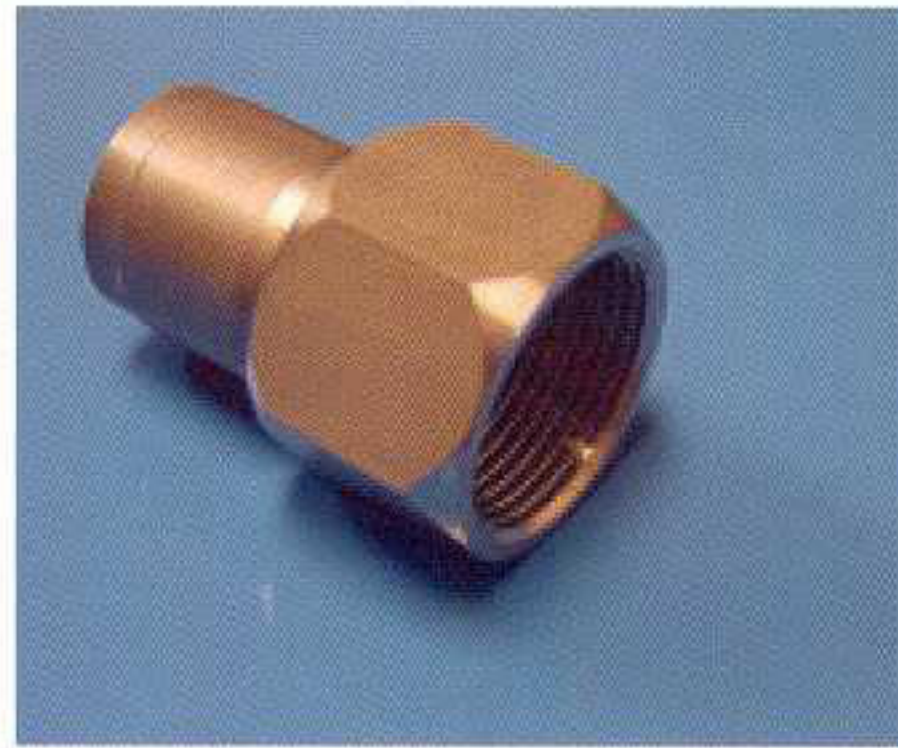

SS FJIC



SS FCF



SS FEMALE NPT



BRASS MNPT



BRASS FJIC



CS MNPT



CS FJIC



CS FJIC90



TUBE STUB



MALE JIC



MINI-TC



MIF 90



MIF 45



MNPT ADAPTER



FNPT ADAPTER

NOT ALL FITTINGS SHOWN

SSB SMOOTH BORE HOSE

SBTW SSB SMOOTH BORE


TEF-LINE PRODUCTS




Part #	I.D. (In)	O.D. (In.)	W.P. (PSI)	BURST PSI	BEND RAD.
SBTW-03	.125	.250	3000	12000	2
SBTW-04	.187	.312	3000	12000	2
SBTW-05	.250	.375	3000	12000	3
SBTW-06	.312	.445	2500	10000	4
SBTW-08	.405	.549	2000	8000	5.2
SBTW-10	.500	.648	1500	6000	6.5
SBTW-12	.625	.778	1200	4800	7.7
SBTW-16	.875	1.03	1000	4000	9
SBTW-20	1.125	1.29	750	3000	16

Temperature Range -65°F to 450°F. Meets or exceeds SAE 100R14 specifications.


Tef-Line Products, Smoothbore PTFE with Stainless Steel braid is one of our most versatile lines. It is an ideal choice for such applications as food, beverage, adhesives, paints, pneumatics systems, automotive, and hydraulic. Fitting materials from Stainless Steel, Brass, or Carbon Steel are available in swage or crimp. SBTB has a black static dissipative tube.

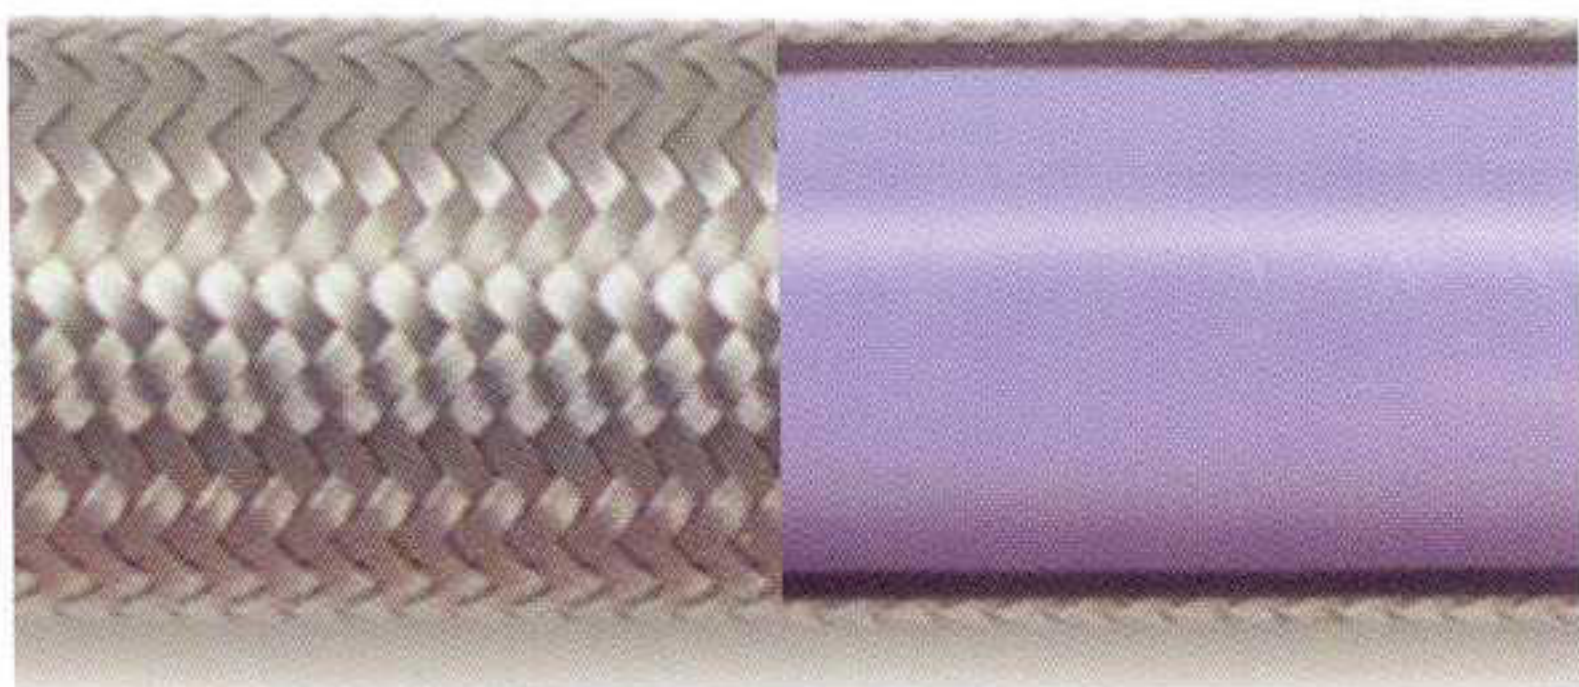


SBTW

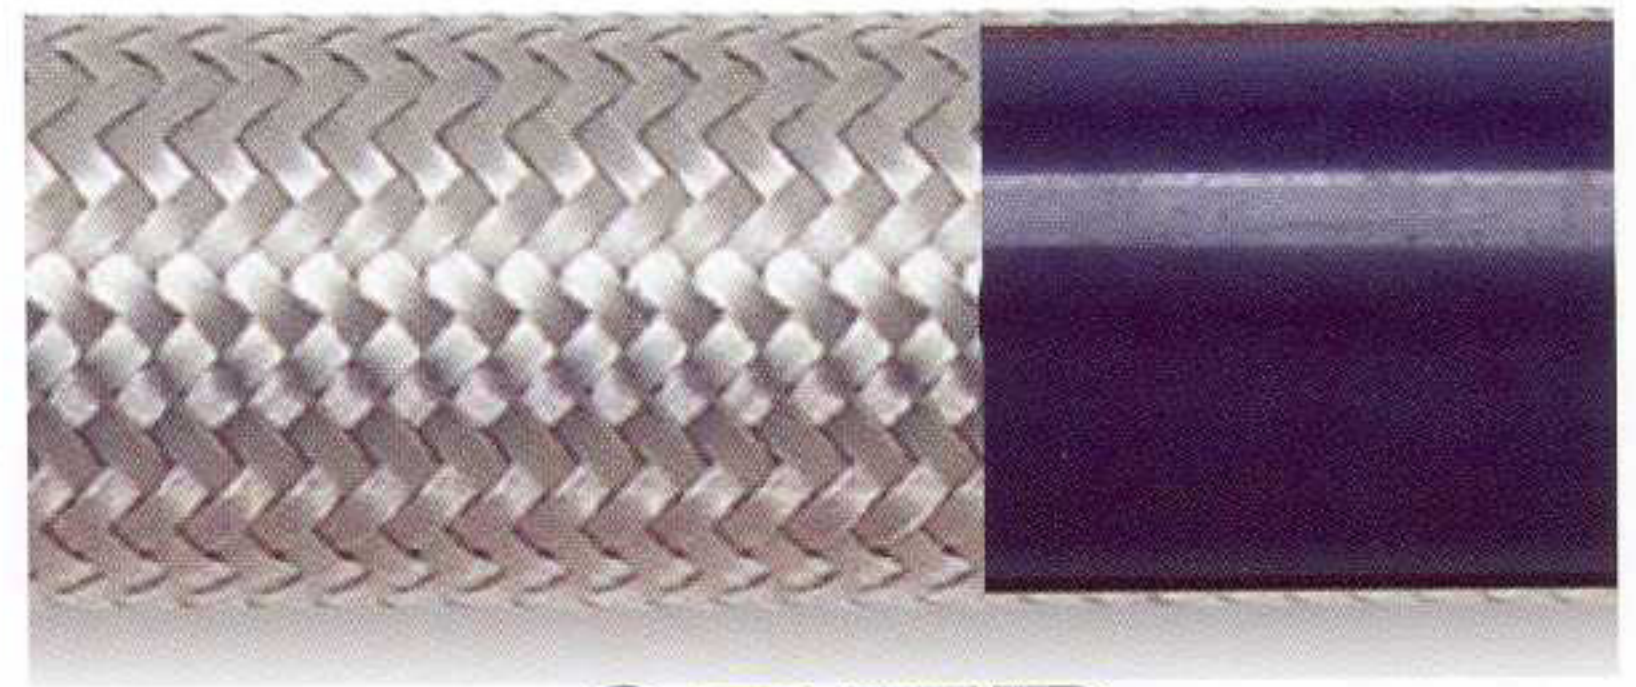

SBTB

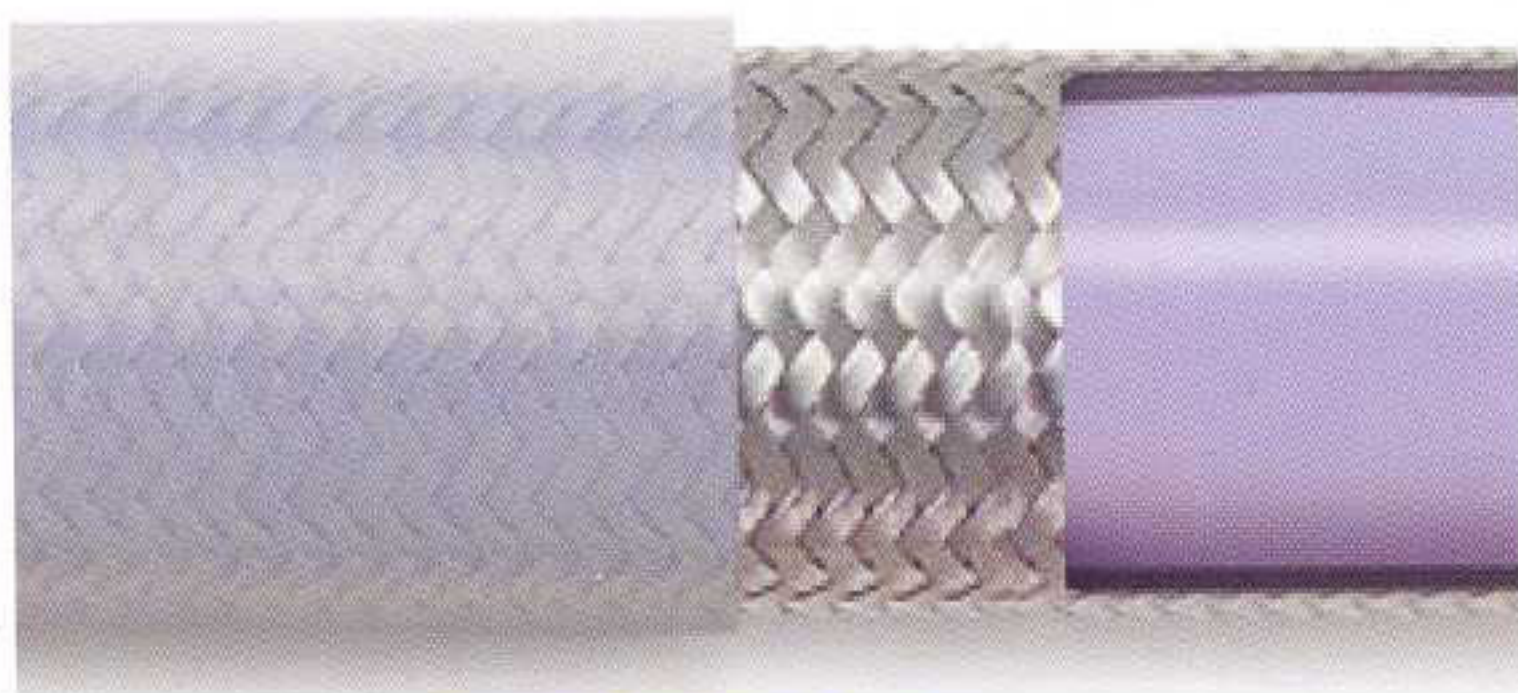

SBTW-C

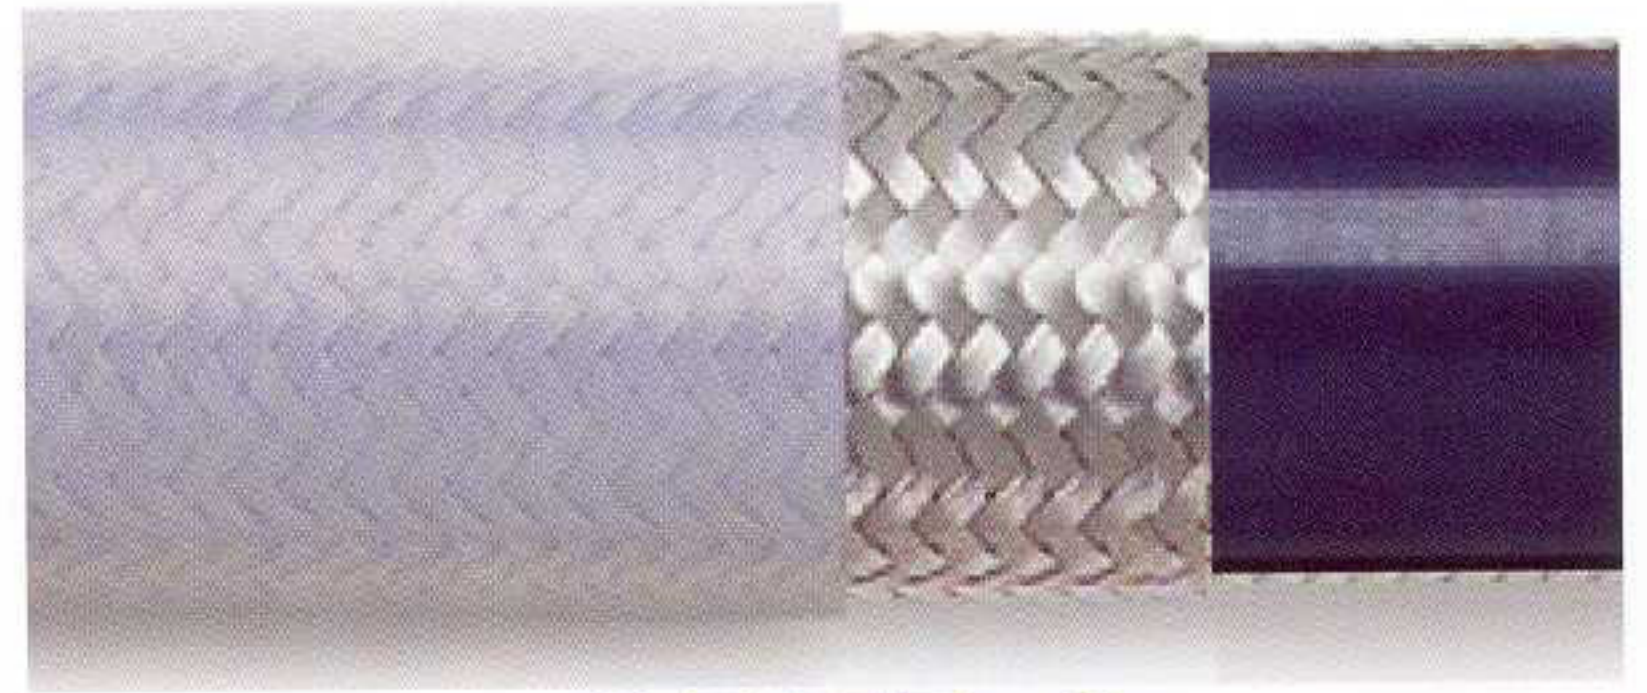

SBTB-C

CLEAR COVER